


ZHYA30 显示仪表

尺寸及量程

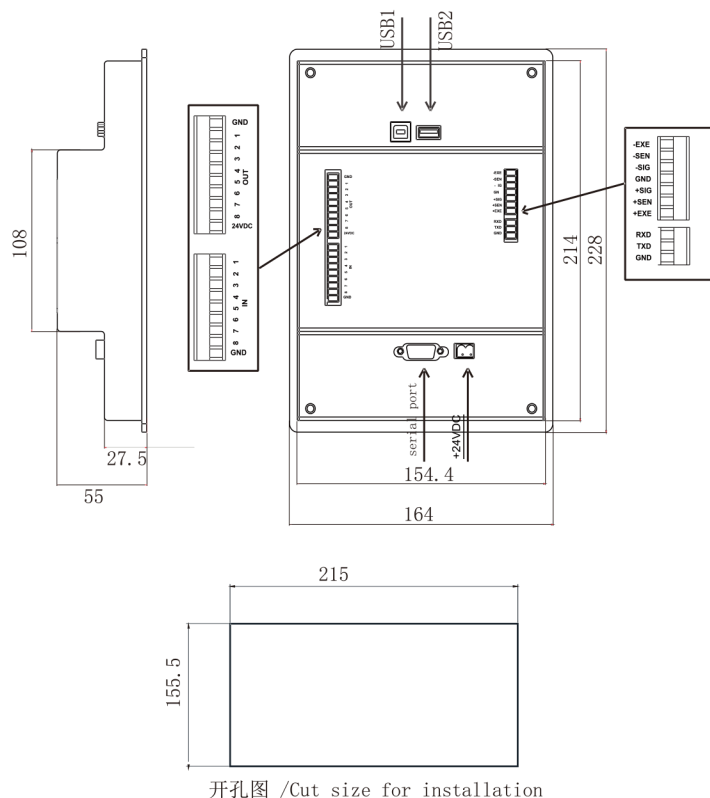

技术参数

参数	Specifications	技术指标/Technique
工作电压	Power supply	24VDC
最大功耗	Maximum power consumption	5W
1路称重信号输入	1 weighing signal input	0~22mV
激励电压输出	Excitation voltage output	5VDC
最高采样频率	Maximum sampling frequency	800Hz
零位漂移	Zero drift	$\pm 0.15\mu V/^{\circ}C$
增益漂移	Gain drift	$\pm 2ppm/^{\circ}C$
非线性度	Nonlinearity	0.0015% F.S.
开关量输入	Digital input	8 DI
开关量输出	Digital output	8 DO
通信接口	Communication Interface	RS232/RS485/Intel networks
工作温度	Operating temperature	-10 $^{\circ}C$ ~+40 $^{\circ}C$
储存温度	Storage temperature	-40 $^{\circ}C$ ~+60 $^{\circ}C$
相对湿度	Relative humidity	$\leq 95\% RH$
防护等级	Protection class	IP54
重量	Weight	1.4kg



特点与用途

- 力值图表显示仪表
- 防护等级:IP54
- 7英寸彩色触摸屏
- 操作简单
- 中英文界面
- 8路输出
- 实时曲线显示, 支持数据库
- 进行简单逻辑控制编程, 省掉PLC
- 直接连接打印机
- 选配:
 - 通信方式可选RS232/485
 - 支持MODBUS-RTU通信协议
 - Graphic display to show force over time
 - IP54 protection
 - 7 inches color touch screen
 - Simple operation
 - Interface in both Chinese and English
 - 8 output
 - Real-time curve display
 - Support database
 - For simple logic control programming, can replace PLC
 - Printer connection
 - Optional
 - RS232 and RS485 connection
 - MODBUS RTU communication protocol